



TIP-ON for doors

Easy opening with integrated door gap adjustment

www.blum.com


 **blum**[®]

Single-touch opening

Handle-less fronts open at a single touch with the TIP-ON mechanical opening system by Blum. To close, simply press shut. TIP-ON is combined with the tried and tested unsprung CLIP top hinge to deliver top quality motion for doors. TIP-ON can also be used for AVENTOS stay lifts.

 **blum**



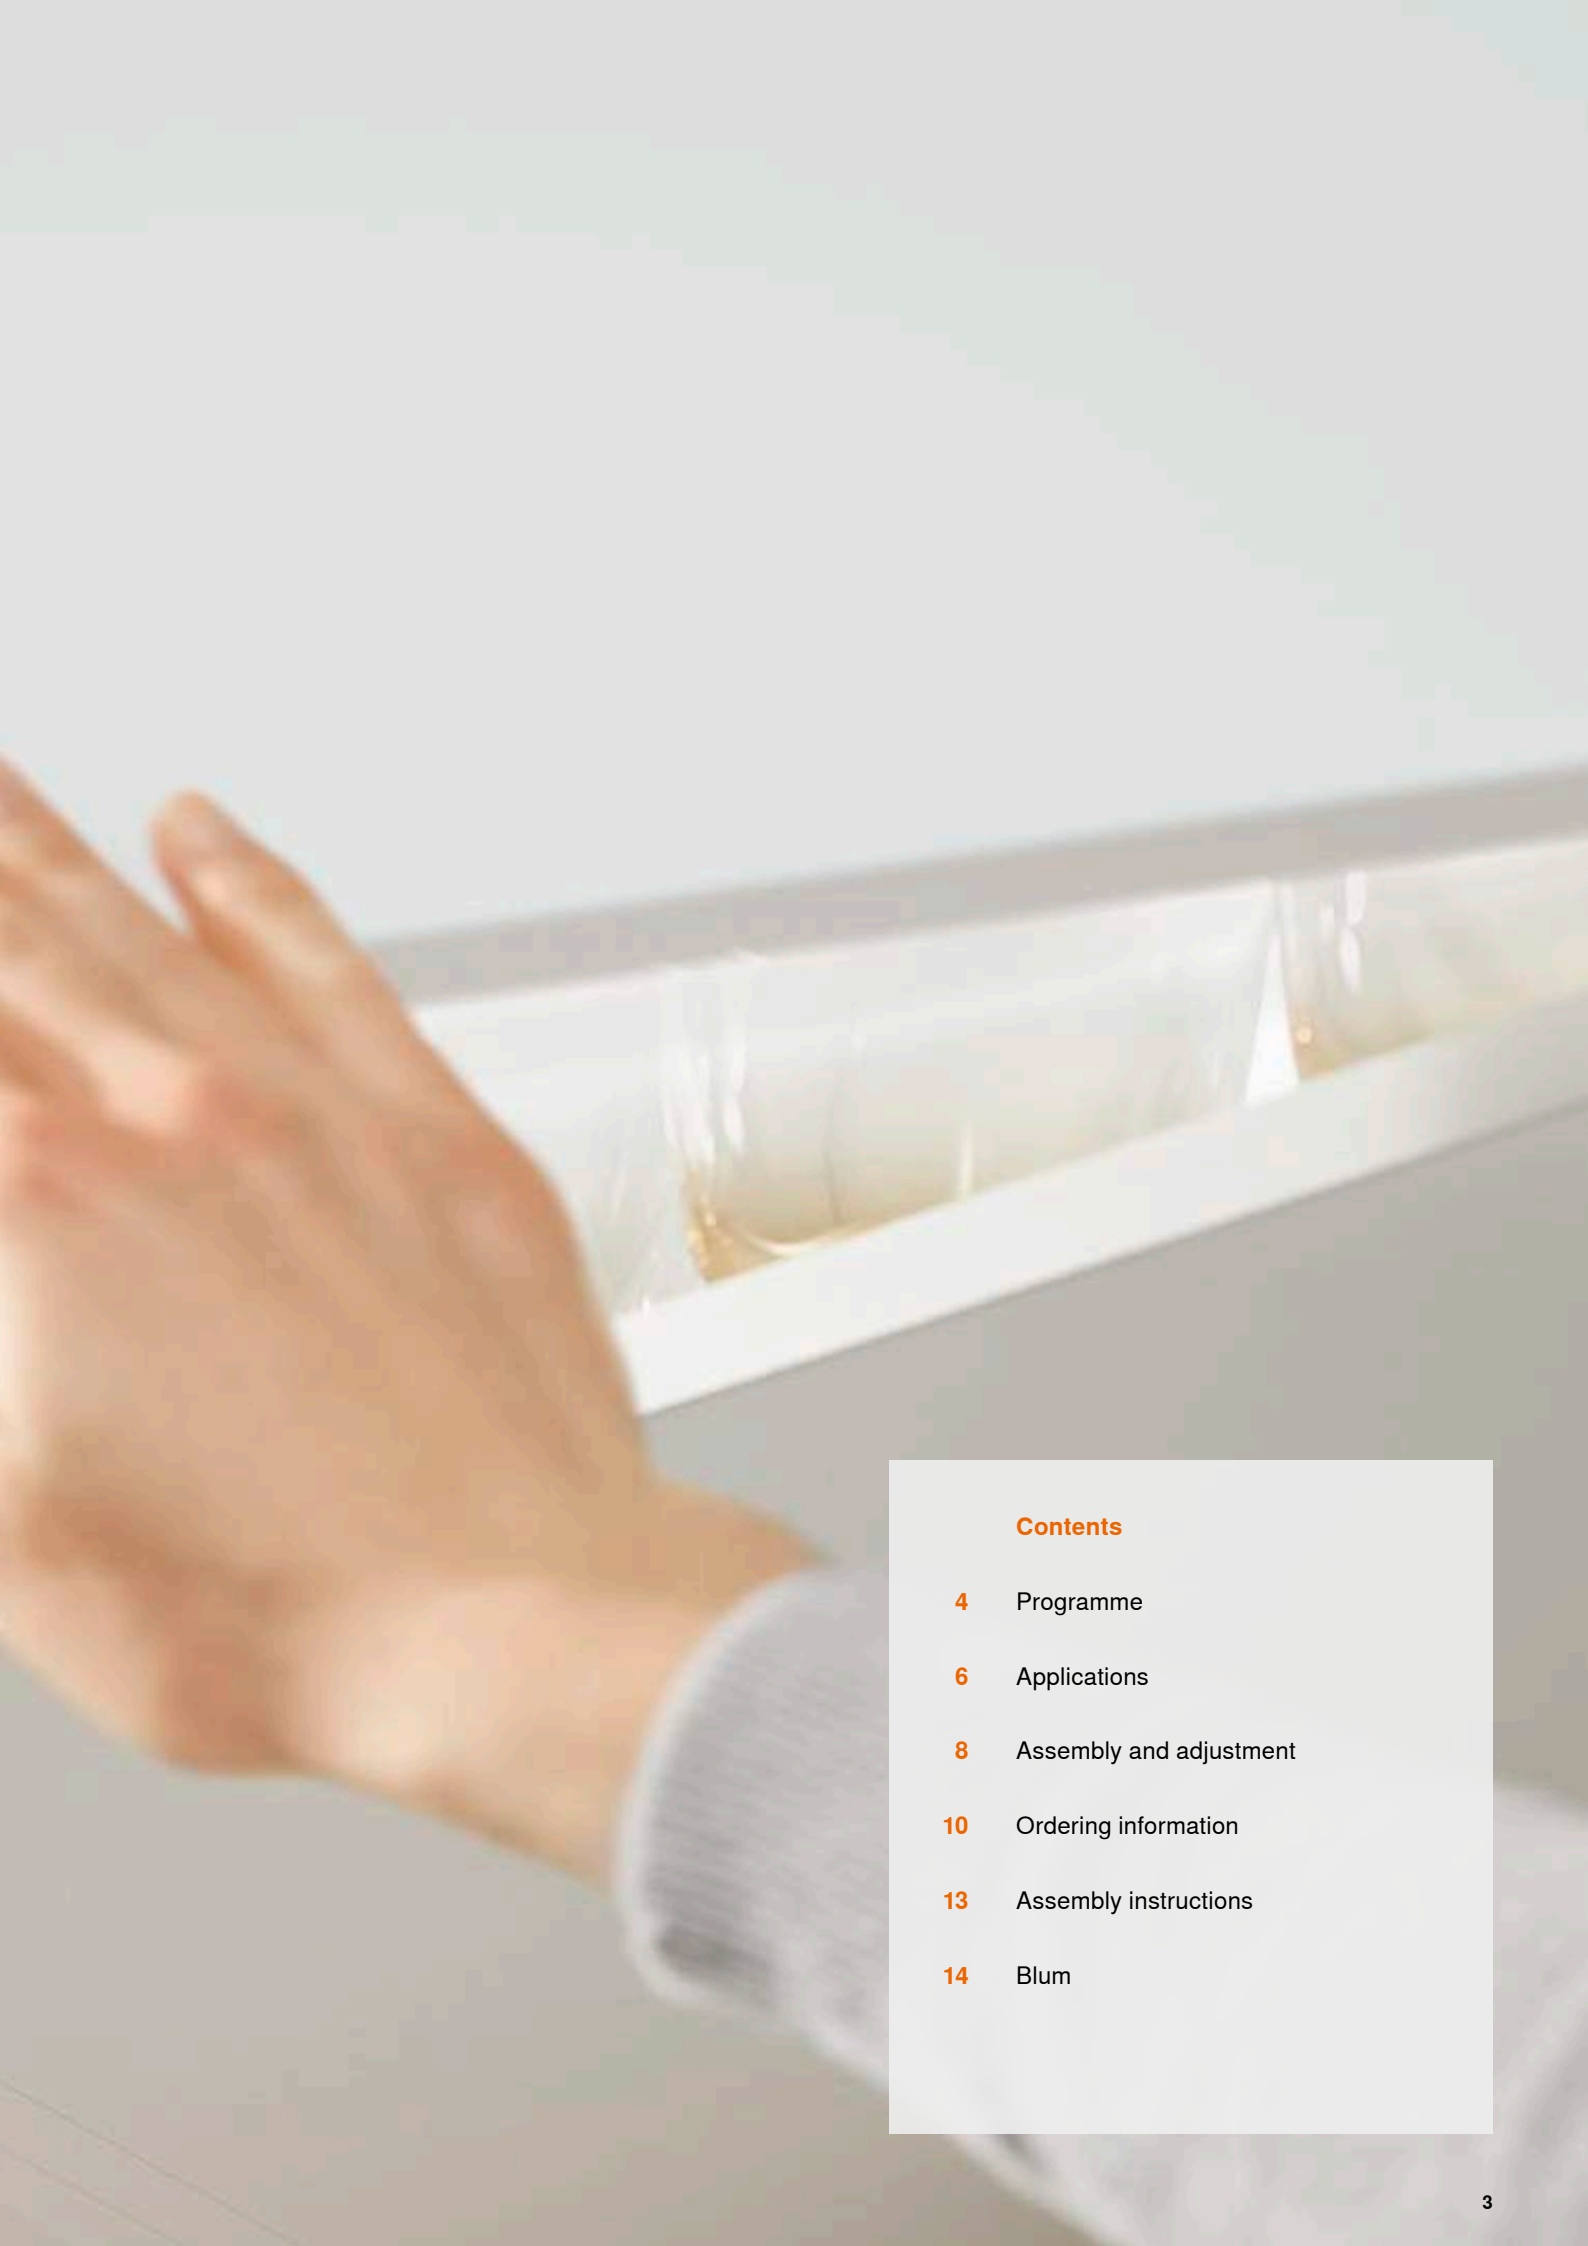

Contents

- 4** Programme
- 6** Applications
- 8** Assembly and adjustment
- 10** Ordering information
- 13** Assembly instructions
- 14** Blum

Extended programme


You will always find the right TIP-ON unit for doors and AVENTOS stay lifts thanks to the wide array of colours and comprehensive programme of adapter plates. You can opt between the short and long version of TIP-ON, for drilling or with an adapter plate depending on application. The door gap adjustment feature is integrated in all models. The fitting merges beautifully with the cabinet interior, offering freedom of design and top quality motion.

 **blum**



Tool-free door gap adjustment

The adjustment feature (+4/-1 mm) has been incorporated into the TIP-ON unit so even TIP-ON for drilling has integrated gap adjustment. To adjust gap, turn the ejector pin. The click-stop positions allow you to easily find the right setting.

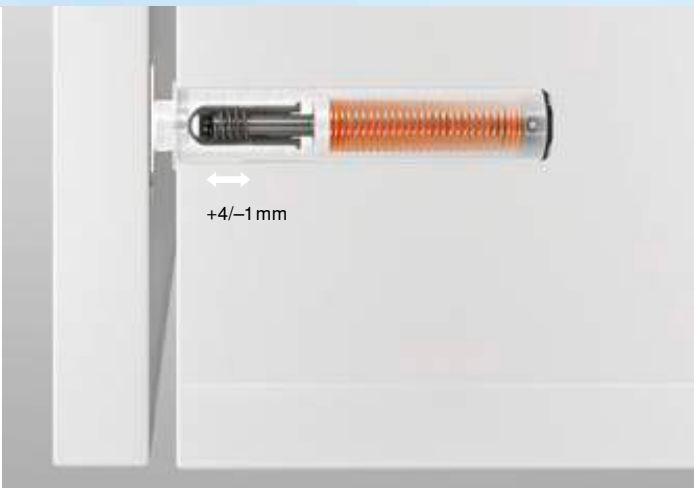

Harmonious integration

TIP-ON can be adjusted so that it is the perfect match for your cabinet interior. TIP-ON is available in nickel finish, silk white, platinum grey and terra black, giving you great freedom of design. It also blends in harmoniously with furniture interiors.



Extended adapter plate programme

Both the short and long version of TIP-ON can be combined with a wide array of adapter plates, ensuring that you can maintain a slim design. Opt for the rectangular and straight-cut plate for a sleek and discreet look.



Multitude of applications

The extended TIP-ON programme offers you even more design options for handle-less doors and lift systems throughout the home. No matter whether TIP-ON for drilling or TIP-ON with an adapter plate, the fitting delivers the top quality motion you can rely on.

 **blum**

All the components of furniture interiors harmonise beautifully with TIP-ON. For more freedom of design for furniture – in kitchens, dining rooms, living rooms and bathrooms.



Easy assembly

TIP-ON offers you sophisticated technology and easy adjustment because the door gap adjustment feature is integrated in the fitting. There are special assembly templates by Blum. They are an extra help for installation and ensure that TIP-ON functions perfectly.

 **blum**





Easy assembly

The drilling template for BLUMOTION and TIP-ON helps you drill the horizontal fixing positions of TIP-ON for doors and stay lifts.



Optimal protection

The fully enclosed TIP-ON housing ensures perfect installation and protects the technology on the inside of the TIP-ON unit.



Precise transfer of measurements

The mounting position is indicated on the lower part of the adapter plate. Or you can use the template for positioning.



Versatile assembly

The adapter plates can be fixed with chipboard screws or system screws – the choice is yours.



Secure closing

The catch plate is the counterpart to TIP-ON. There are two versions: a glue-on version or one that screws to the door. The TIP-ON magnet ensures that the front stays closed.



Integrated door gap adjustment

The arrow markings tell you in which direction to turn the ejector pin. One turn (= 4 click-stop positions) adjusts the door gap by 1 mm. The ejector pin cannot be turned beyond the pre-defined adjustment range.

TIP-ON for doors



Ordering and planning information

Short version with magnet





- For overlay doors up to approx. 1300 mm in height
- For unsprung hinges
- For drilling $\varnothing 10 \times 50$ mm
- Nylon
- Output path approx. 17 mm
- Incl. glue-on and screw-on catch plates
- Adjustment from + 4.0/- 1.0 mm

Colour variants

SW R7036 TS

956.1004

Planning

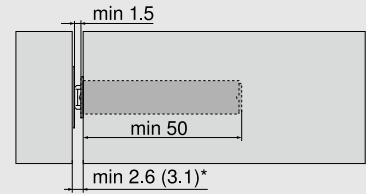

* min. 2.6 mm with glue-on catch plate

* min. 3.1 mm with screw-on catch plate

Long version with magnet





- For overlay doors starting from approx. 1300 mm in height or inset doors
- For unsprung hinges
- For drilling $\varnothing 10 \times 76$ mm
- Nylon
- Output path approx. 38 mm
- Incl. glue-on and screw-on catch plates
- Adjustment from + 4.0/- 1.0 mm

Colour variants

SW R7036 TS

956A1004


Planning

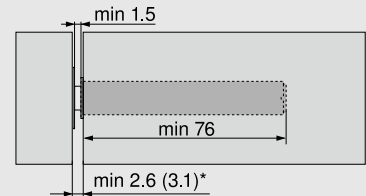

* min. 2.6 mm with glue-on catch plate

* min. 3.1 mm with screw-on catch plate

Long version with bumper





- For sprung hinges*
- No catch plate required**
- For drilling $\varnothing 10 \times 76$ mm
- Nylon
- Output path approx. 38 mm
- Adjustment from + 4.0/- 1.0 mm

Colour variants

SW R7036 TS

956A1006

Planning

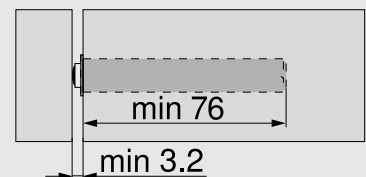

* A trial application is recommended

** We recommend using a catch plate for fixing to very soft surfaces

Assembly devices



Drilling template

To drill holes in front face for TIP-ON

65.5010





Positioning template for catch plate

For determining the screw-on position of the TIP-ON catch plate

65.5210.01

Screw-on/Glue-on catch plate



* For screw-on catch plates we recommend positioning 3 mm away from TIP-ON.
For hard surfaces and/or MTF, $\varnothing 2.5$ mm pre-drilling and counter-sinking if required.

The surface of the front must be clean, oil-free and dry

FA front overlay



Inline adapter plate – short version – 20/17




- Assembly using chipboard screws \varnothing 3.5 mm or \varnothing 4 mm or with system screws
- Nylon
- TIP-ON must be ordered separately

Colour variants

NI-L SW R7036 TS

956.1201

Planning

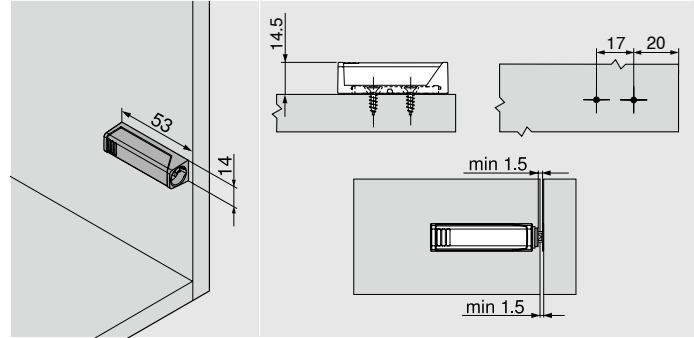

Inline adapter plate – long version – 20/32




- Assembly using chipboard screws \varnothing 3.5 mm or \varnothing 4 mm or with system screws
- Nylon
- TIP-ON must be ordered separately

Colour variants

NI-L SW R7036 TS

956A1201

Planning

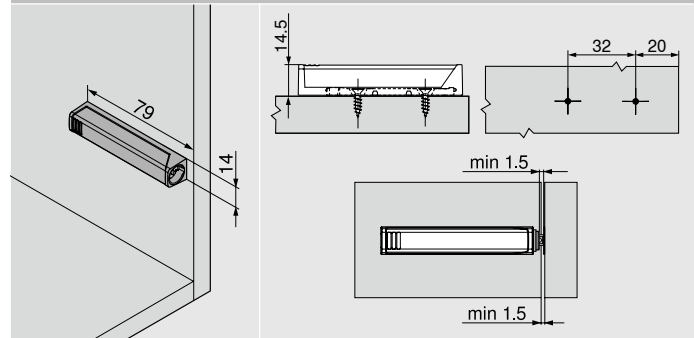

Cruciform adapter plate – long version – 37/32




- Assembly using chipboard screws \varnothing 3.5 mm or \varnothing 4 mm or with system screws
- Nylon
- TIP-ON must be ordered separately

Colour variants

R7036

956A1501

Planning

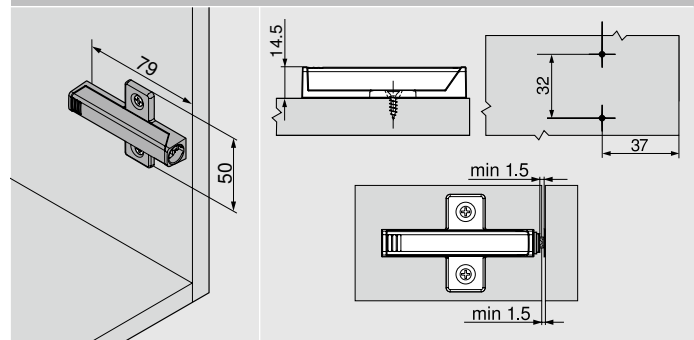

Assembly devices





Template

To pre-drill fixing positions of adapter plates

65.5300

Screw-on/Glue-on catch plate



* For screw-on catch plates we recommend positioning 3 mm away from TIP-ON.
For hard surfaces and/or MTF, \varnothing 2.5 mm pre-drilling and counter-sinking if required.

The surface of the front must be clean, oil-free and dry

FA front overlay
























Colour variant abbreviations

NI-L	Nickel finish
SW	silk white
R7036	RAL 7036 platinum grey
TS	terra black

TIP-ON for doors



Unsprung hinges for TIP-ON applications

							
	Application	Boss fixing	Overlay application	Dual application	Inset application	Blind corner	Angled
	110° hinge	INSERTA	70T3590BTL	70T3690BTL	70T3790.TL		
		Screw-on	70T3550.TL	70T3650.TL	70T3750.TL		
	110° special hinge	INSERTA	72T3590BTL				
		Screw-on	72T3550.TL				
	107° hinge	INSERTA	74T1590BTL	74T1690BTL	74T1790BTL		
		Screw-on	74T1550.TL	74T1650.TL	74T1750.TL		
	100° hinge	Screw-on	70M2550.TL	70M2650.TL	70M2750.TL		
		Knock-in	70M2580.TL	70M2680.TL	70M2780.TL		
	170° wide angle hinge	INSERTA	70T6540B	70T6640B			
		Screw-on	70T6550	70T6650			
	155° wide angle hinge	INSERTA	70T7540NT1	70T7640NT1			
		Screw-on	70T7500NTL	70T7600NTL			
	95° profile door hinge	Screw-on	70T9550.TL	70T9650.TL	70T9750.TL		
	95° blind corner hinge inset application	Screw-on				78T9550.TL	
	95° aluminium frame door hinge	Screw-on	70T950A.TL				
	CRISTALLO hinge	Screw-on	78C450BT				
	Angled hinge +45° I	Screw-on					78A9658.T
	Angled hinge +45° II	Screw-on					78T5550
	Angled hinge +45° III	Screw-on					78A9458.T
	Angled hinge +30° II	Screw-on					78A9556.T
	Angled hinge +30° III	Screw-on					78A9456.T
	Angled hinge +20° II	Screw-on					78A9555.T
	Angled hinge +15° III	Screw-on					78A9454.T
	Angled hinge -15° III	Screw-on					78A5453.T
	Angled hinge -30° III	Screw-on					78A5451.T
	Angled hinge -45° III	Screw-on					78A5450.T





Assembly position

Optimal opening support is achieved if the TIP-ON unit is attached exactly where the handle would be.





The fixing position can deviate ± 300 mm in height and up to a quarter of the cabinet width in terms of width.







Short/long version for drilling







Inline adapter plates



Cruciform adapter plates



TIP-ON adjustment



Blum

Founded over 60 years ago by Julius Blum, today Blum is an internationally active family-owned company. Its strategic business segments include lift, hinge and pull-out systems. All our product developments focus on perfecting motion.

www.blum.com

 **blum**





Blum in Austria and around the world

The company has seven plants in Vorarlberg, Austria, additional production sites in Poland, the USA and Brazil and 27 subsidiaries/representative offices. Blum supplies more than 120 markets. The Blum Group employs 6.600 people in total, 5.000 of whom work in Vorarlberg.



Global customer benefits

"Whether manufacturer, distributor, fitter or kitchen user – everybody should personally enjoy the benefits of Blum products" – that is Blum's philosophy on global customer benefits.



Innovations

To support customers with innovative fittings solutions and secure long-term success for the company, we need to consistently invest in research and development, in plants and facilities and in employee training. With more than 1200 registered trademarks around the world, Blum is one of Austria's most innovative companies.



Quality

At Blum, the comprehensive concept of quality does not only apply to products. Services and our cooperation with customers and partners should also meet the same quality requirements.



Environment

At Blum, we believe that responsible ecological behaviour has long-term economic benefits. The longevity of products is just one of many important aspects. Other important measures include the use of environmentally friendly processes, the intelligent use of materials and prudent energy management.



DYNAMIC SPACE

Good workflows, optimum use of storage space and high quality of motion are important features of a practical kitchen. Blum's ideas for practical kitchen are designed to bring function, convenience and ergonomics to furniture interiors.



Blum U.K.
Mandeville Drive
Kingston, Milton Keynes
GB-Buckinghamshire MK10 0AW
Tel.: 01908 285700
Fax: 01908 285701
E-mail: info.uk@blum.com

Julius Blum GmbH
Furniture Fittings Mfg.
6973 Höchst, Austria
Tel.: +43 5578 705-0
Fax: +43 5578 705-44
E-mail: info@blum.com
www.blum.com

